
Connect 2 Cleanrooms

Cleanroomshop

Modular Hardwall Cleanroom

CR5

I&V optional

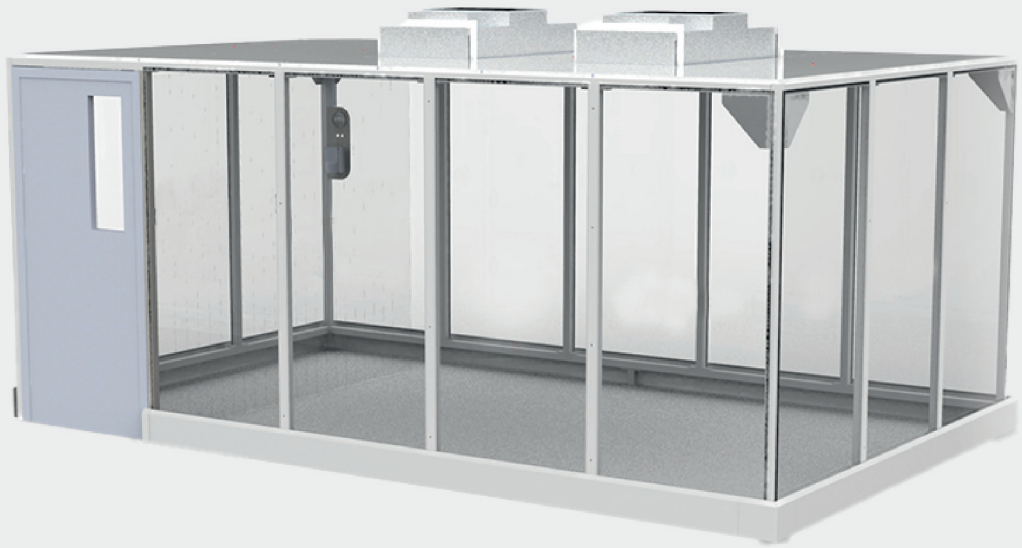

Brand
Connect 2 Cleanrooms

Country of origin
United Kingdom

SKU
CR5

Type
Hardwall cleanroom

Lead time
2 weeks

Size (LxW)
5.4m x 3.3m

Production area
4.2m x 3.1m

Change area
1m x 3.1m

Internal height
2.1m

External height
2.407m

Cleanroom class as built
ISO Class 7

Sterility
Non-sterile

Materials
Powder coated steel frame, PETg hardwall panels, softwall curtain strips

Controls
1 x variable speed controller

Monitoring
1 x fan filter unit pressure gauge

Filtration
2 x HEPA H13 fan filter unit

Lighting
4 x LED lights – over 500 lux

Mobile or fixed cleanroom
Fixed

Doors
Right-hand single leaf door with a choice of position

Internal walls
Softwall curtain divide between change area and production area

Vents
Low level vent protectors

Optional

Flooring
Cleanroom approved jigsaw flooring kit

Trunking
Dado trunking kit with up to 10 double sockets / RJ45 ethernet outlets

Transfer hatch
Transfer hatch and mounting kit

Installation and validation
Installed and validated by qualified Connect 2 Cleanrooms engineers

Why this cleanroom

Our predesigned hardwall cleanroom range has been built by you – from years of collaborating with clients worldwide, we've created a ready-to-ship solution combining highly-requested sizes with popular specifications – ideal for a wide range of industries and applications. Each hardwall cleanroom creates an ISO 14644-1 compliant environment, perfect for universities, injection moulding, manufacturing, packaging, start-ups, and more.

Validation only

This price is based on work being carried out Monday to Friday 9am to 5pm and the validation will be to ISO 14644-1:2015 standard.

The validation will include particle counts to the 'as built' occupancy state and airflow readings, it will be inclusive of an interim and full validation report.

Installation & validation

This price is based on 2 engineers attending site over 2 consecutive working days, Monday to Friday 9am to 5pm to carry out the installation of the cleanroom and then a validation to ISO 14644-1:2015.

The validation will include particle counts to the 'as built' state and airflow readings, it will be inclusive of an interim and full validation report.

Installation will be subject to our availability and current demand.

Electrical works are excluded from I & V option. When completing your own installation, your electrician must be qualified to Electrical Inspection & Testing 2391.

Service contract

This will provide you with a complete package to maintain and protect your critical processes and investment. This will include an extended warranty for a further 12 month period, 24/7 phone support, a call out support in between service visits and 2 engineer visits to be taken over a 12 month period from the date of installation. Visits will take place within working days, Monday to Friday 9am to 5pm.

The interim visit (6 months after install) will include particle counts to ISO 14644-1:2015 standard in the 'at rest' state, airflow readings on the annual full visit (12 months after install). Price is inclusive of an interim and full validation report.

More information


Pricing is based on the location being within mainland UK, POA for other areas or if a wider scope of works is required. Forklift required upon delivery for offloading purposes. Please make arrangements to offload the pallets when received. Please ensure you are ordering correctly against your specification as these are non-returnable items, unless found faulty on receipt of order.

Bespoke Cleanrooms

We design, build and support cleanroom solutions tailored to your business.

With extensive industry knowledge and a straightforward, no-nonsense approach, we're the trusted partner for organisations seeking custom-built cleanroom solutions, whether you're new to cleanrooms or an experienced professional.

Please call the team on **01524 812 899** for support, bespoke enquiries or any further questions.

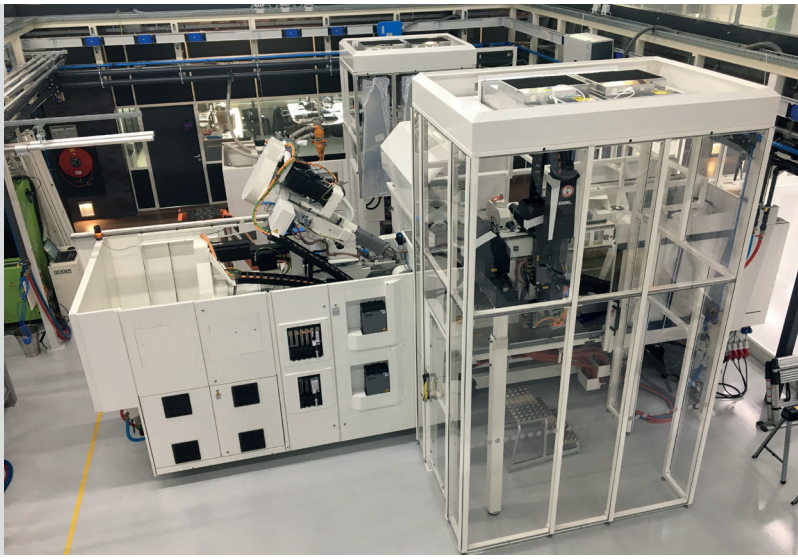

Start a project with us

Our design and build specialists have experience working with customers in all kinds of industries on a global scale, achieving great results time and time again. We'd love to work with you as well!

Time lapse

Scan the QR code to see a time-lapse of a predesigned cleanroom build

enquiries@connect2cleanrooms.com

+44 (0)1524 812 899

Connect 2 Cleanrooms Riverside House, Forge Lane, Halton, Lancaster, Lancashire, LA2 6RH